


Rakoraf - Sample Taker




The Rakoraf Core Sampler is the fastest and **easiest method to take an accurate sample** from an open trailer. The sample can be taken while the trailer is still on the weighbridge.

The telescopic arm with the core tube can be extended and retracted, turned horizontally or raised and lowered

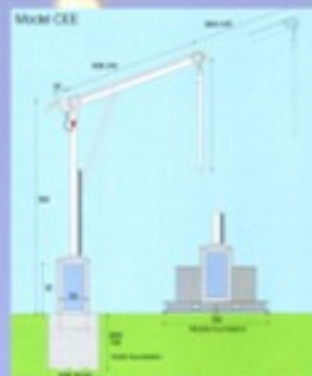

Rakoraf advantages:

- * Gives a truly representative sample.
- * Complete electrical operation.
- * Delivers the sample automatically to the office.
- * Both weighbridge and sampler can be operated by the same person at the same time.
- * Standard outfit includes hand-held controls, overhead halogen floodlights for night time operation and signal horn.
- * All moving parts are mounted in polyethylene or nylatron.
- * Minimal maintenance and only 4 lubricating points.

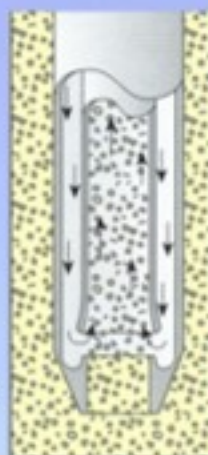

Specifications

Probe length	300cm
Connection	400V, 50Hz
Shipping weight	475kg
Motor sizes :	
Up down	0.55Kw
Telescopic arm	0.37Kw
Turning	0.25Kw
Ventilator	1.20Kw

Automatic Sampler

Automatic sampler for cereals, feedstuffs, seeds and similar bulk flow solids.

Sampling is effective by means of a diverter with an open slot in the leading edge. The diverter is moved automatically through the stream of grain. Thus a correct sample is taken from across the spout area, not just at the side or at the center of the grain.

Specifications

Housing	Rilsan covered steel plate. Other metal components are electrogalvanised.
Power supply	3 phase 400V, 50 Hz. 3 phase 230V, 50Hz.

